

Buchsenleisten RM 2,00mm - 2-/4-reihig BH 9,35mm Female Headers Pitch 2,00mm - 2 / 4 rows - Height 9,35mm


Technische Daten / Technical Data

Isolierkörper <i>Insulator</i>	Thermoplastischer Kunststoff, nach UL94 V-0 <i>Thermoplastic, rated UL94 V-0</i>
Kontaktmaterial <i>Contact Material</i>	Phosphorbronze <i>Phosphor bronze</i>
Kontaktoberfläche <i>Contact Surface</i>	Lt. Oberflächenoptionen, über Ni (1,3 ... 2,5µm) <i>Acc. to options (see below), over Ni (1,3 ... 2,5µm)</i>
Lötbarkeit <i>Solderability</i>	IEC512-12A <i>IEC512-12A</i>
Durchgangswiderstand <i>Contact Resistance</i>	< 20mΩ <i>< 20mΩ</i>
Isolationswiderstand <i>Insulation Resistance</i>	> 5x10 ⁹ Ω <i>> 5x10⁹Ω</i>
Nennspannung <i>Voltage Rating</i>	500V _{AC} <i>500V_{AC}</i>
Nennstrom <i>Current Rating</i>	1A <i>1A</i>
Temperaturbereich <i>Temperature Range</i>	-40°C ... +105°C <i>-40°C ... +105°C</i>
Verarbeitung <i>Processing</i>	Reflow-Lötverfahren; weitere Informationen in Kapitel T <i>Reflow-soldering, detailed information in ch. T</i>



© W+P PRODUCTS

Passende Stiftleiste:
Mates with pin header:
414
PC-104-Plus Standard

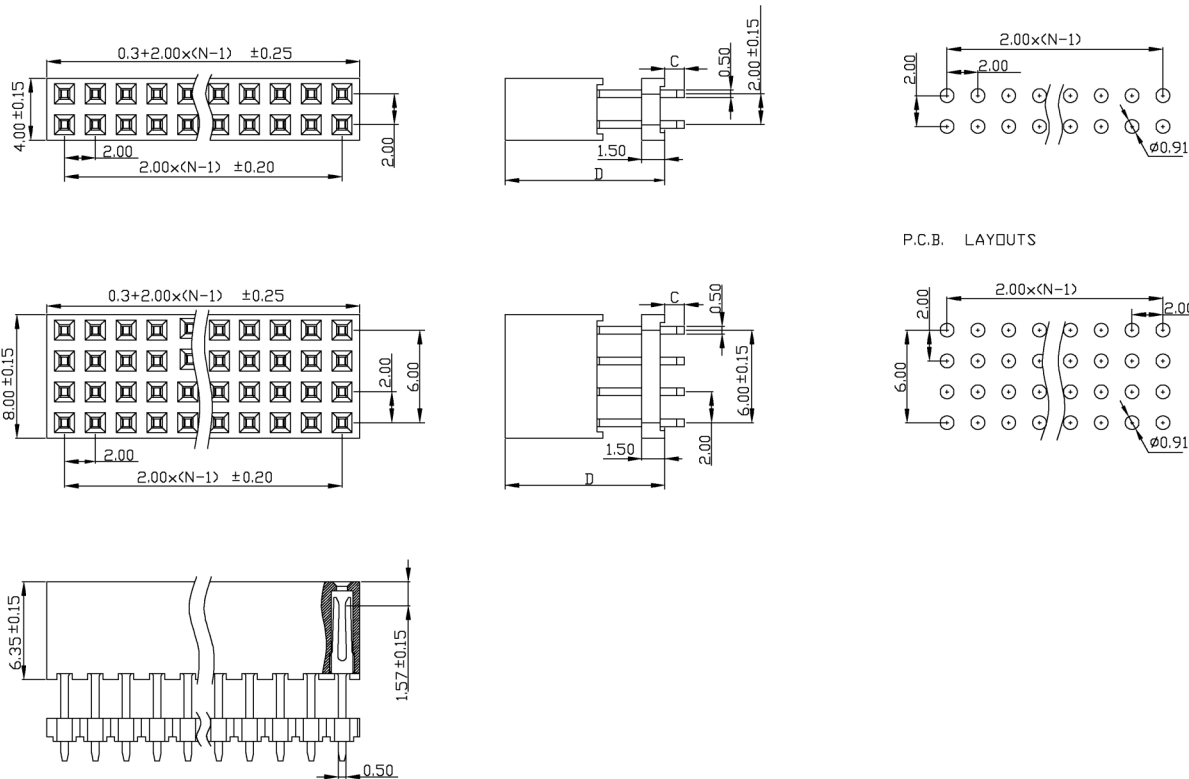

Series	Contacts*	Rows*	Dimensions*	Plating*
415	120 004-080 zweireihig <i>double row</i> 012-160 vierreihig <i>four rows</i>	4 2 zweireihig <i>double row</i> 4 vierreihig <i>four rows</i>	10 10 C=2,28mm; D=9,35mm 20 C=11,99mm; D=9,35mm 99 Kundenspezifisch <i>Customer's specifications</i>	00 00 Vergoldet <i>Gold plated</i> 50 Verzinkt <i>Tin plated</i> 60 Sel. Au / Sn <i>Duplex plating</i>

(* Bestellbeispiel - Bitte durch Ihre Spezifikationen ersetzen.)

(* Order example - To be replaced by your specifications.)

TEL.: +49 5223 98507-0
FAX.: +49 5223 98507-50

W+P PRODUCTS

E-MAIL: sales@wpro.com
INTERNET: www.wpro.com