


Langprofilbuchsenleiste RM 2,54mm - 1-/2-/3-reihig Long Profile Female Header - Pitch 2,54mm - 1-/2-/3-Rows


Technische Daten / Technical Data

Isolierkörper <i>Insulator</i>	Thermoplastischer Kunststoff, nach UL94 V-0 <i>Thermoplastic, rated UL94 V-0</i>
Kontaktmaterial <i>Contact Material</i>	Kontakt für Vierkantstift 0,635mm, Kupferlegierung <i>Contact for square pin 0,635mm, copper alloy</i>
Kontaktfläche <i>Contact Surface</i>	Lt. Oberflächenoptionen, über Ni (1,3 ... 2,5µm) <i>Acc. to options (see below), over Ni (1,3 ... 2,5µm)</i>
Lötbarkeit <i>Solderability</i>	IEC512-12A <i>IEC512-12A</i>
Durchgangswiderstand <i>Contact Resistance</i>	< 20mΩ <i>< 20mΩ</i>
Isolationswiderstand <i>Insulation Resistance</i>	> 10 ⁹ Ω <i>> 10⁹Ω</i>
Spannungsfestigkeit <i>Test Voltage</i>	1000V _{DC} <i>1000V_{DC}</i>
Nennspannung <i>Voltage Rating</i>	250V _{AC} <i>250V_{AC}</i>
Nennstrom <i>Current Rating</i>	3A <i>3A</i>
Temperaturbereich <i>Temperature Range</i>	-40°C ... +105°C <i>-40°C ... +105°C</i>
Verarbeitung <i>Processing</i>	Reflow-Lötverfahren; weitere Informationen in Kapitel T <i>Reflow-soldering, detailed information in ch. T</i>

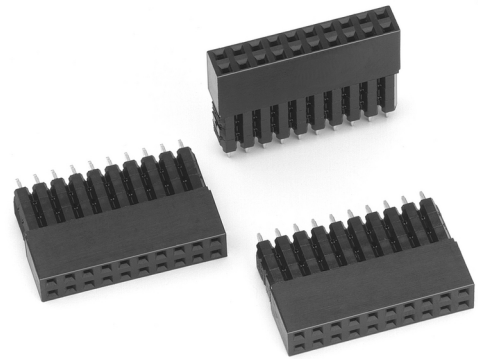

Gabelkontakt für Vierkantstift 0,635mm
Fork contact accepts square pin 0,635mm

© W+P PRODUCTS

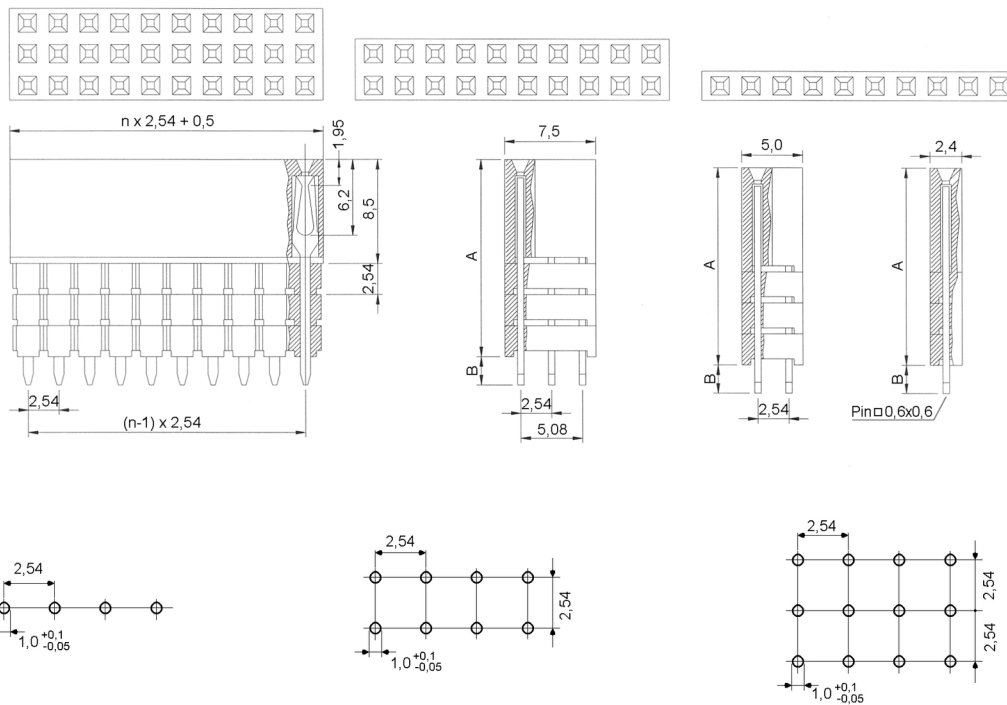

Series	Contacts*	Rows*	Dimensions*	Plating*
622	006 003-040 Einreihig <i>Single row</i> 006-080 Zweireihig <i>Double row</i> 009-120 Dreireihig <i>Triple row</i>	1 1 Einreihig <i>Single row</i> 2 Zweireihig <i>Double row</i> 3 Dreireihig <i>Triple row</i>	50 10 A=11,05mm; B=2,30mm 20 A=11,05mm; B=7,35mm 30 A=11,05mm; B=12,20mm 40 A=13,59mm; B=4,85mm 50 A=13,59mm; B=9,65mm 60 A=16,13mm; B=2,30mm 70 A=16,13mm; B=7,10mm 80 A=18,67mm; B=4,60mm	50 00 Vergoldet <i>Gold plated</i> 50 Verzinkt <i>Tin plated</i> 60 Sel. Au/Sn <i>Duplex plating Au/Sn</i>

(* Bestellbeispiel - Bitte durch Ihre Spezifikationen ersetzen.)

(* Order example - To be replaced by your specifications.)

TEL.: +49 5223 98507-0
FAX.: +49 5223 98507-50

W+P PRODUCTS

E-MAIL: sales@wpro.com
INTERNET: www.wpro.com